
Electric fence wiring diagram

Electric Fencing Guide

AGRARZONE

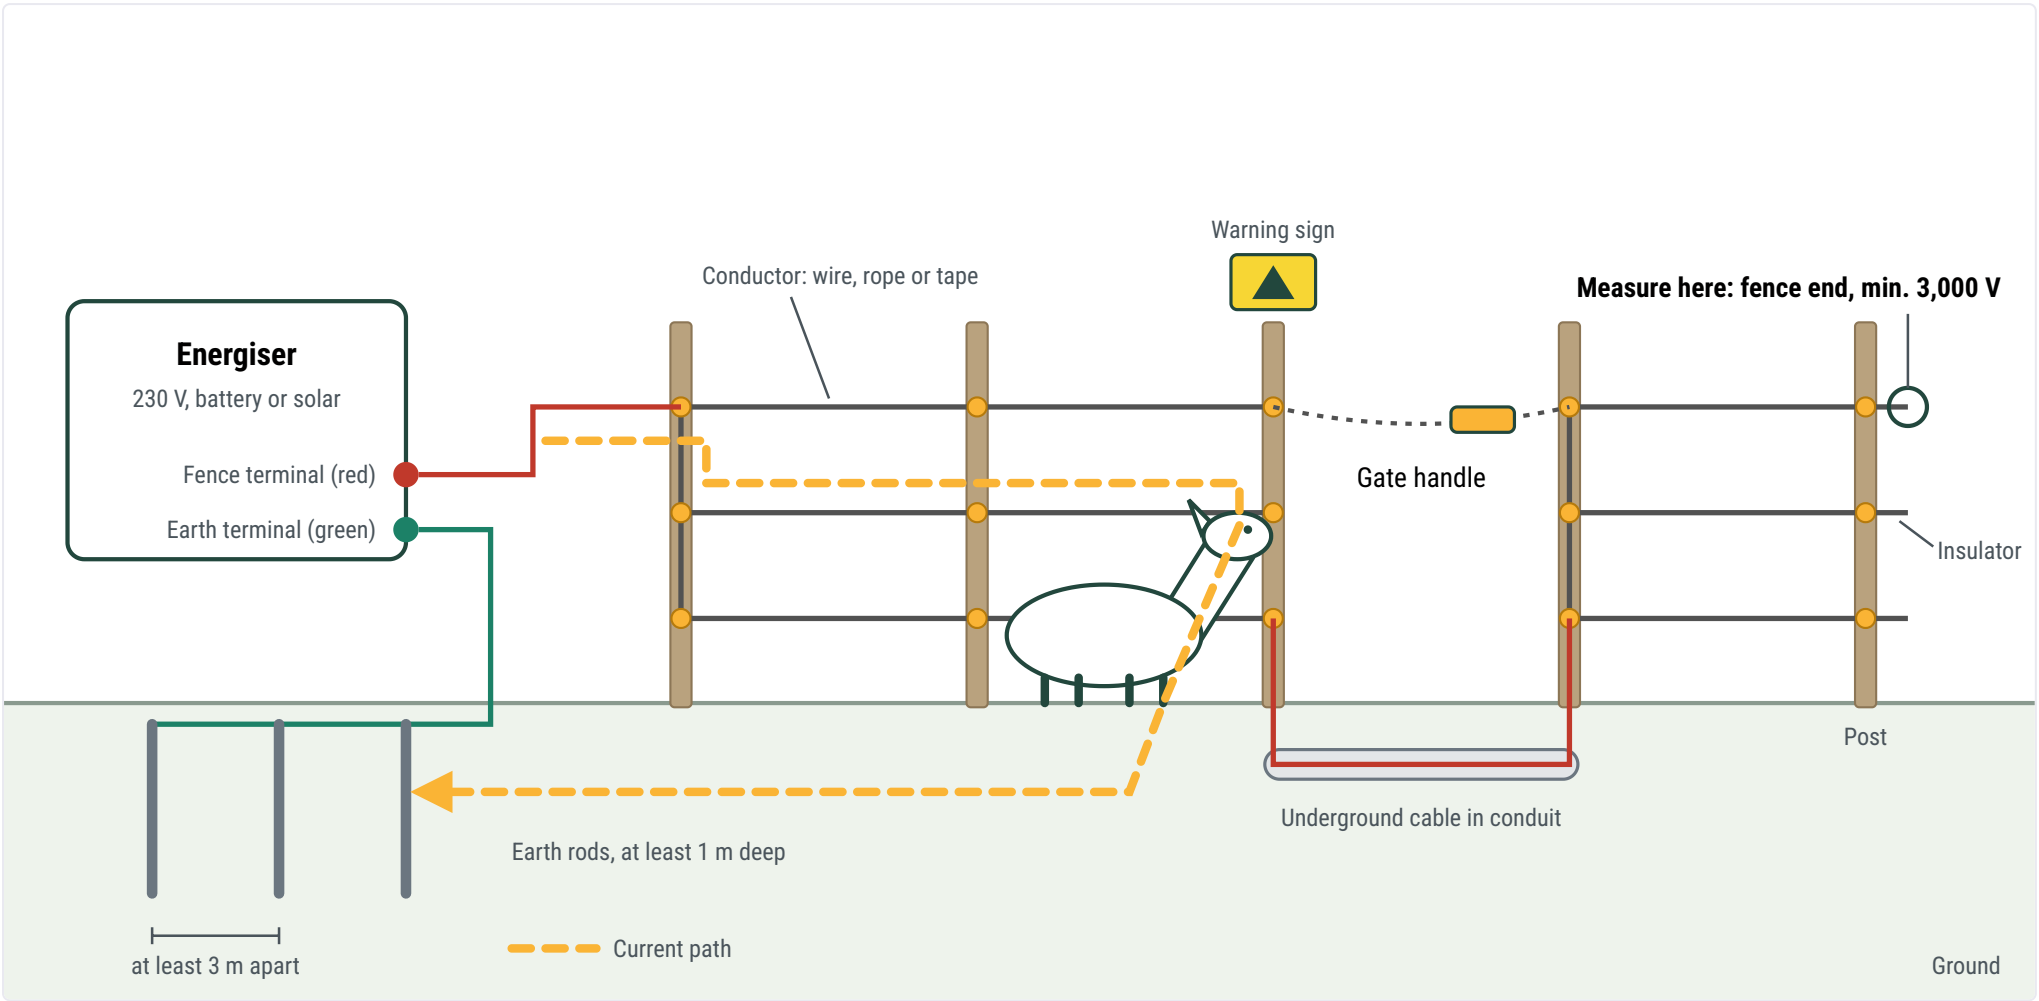

The current flows from the energiser along the conductor, through the animal into the ground and back via the earth rods.

Earthing: the most common source of problems

- At least three earth rods, each about 1 m long and at least 3 m apart.
- Rule of thumb for stronger energisers: about 1 m of earth rod per joule of pulse energy.
- Choose damp spots, such as shade or a hollow. Dry sand and rock conduct poorly.
- Keep at least 10 m away from other earth systems such as house earthing, lightning protection or water pipes.

+43 7746 28582 · info@agrarzone.com